

RX9926

RF Receiver Module with Decoder


- Superheterodyne
- SAW resonator based design
- High sensitivity

Application

- 1) Low baud rates digital signal link
- 2) Industrial remote control, remote monitoring & sensing
- 3) Wireless security alarm receiver and remote control for household electrical appliances.

Technical Specifications

Operating voltage	5.0 VDC \pm 0.5V
Operating current	\leq 5 mA (Vs=5.0 V DC)
Receiver config.	Superheterodyne
Modulation	OOK, ASK
RF Frequency	315 MHz or 433.92 MHz
Channel width	2MHz (315MHz @ 3 dBm rolloff)
Sensitivity	$>$ -100 dBm (50)
Data transmission rate	$<$ 9.6 Kbps (315MHz, -95 dBm)
On board decoder IC	PT-2272-L4 or compatible chip (8-bit trinary address, 4-bit binary data)
Output	TTL compatible
Antenna length	24 cm (315MHz), 18 cm (433.92 MHz)

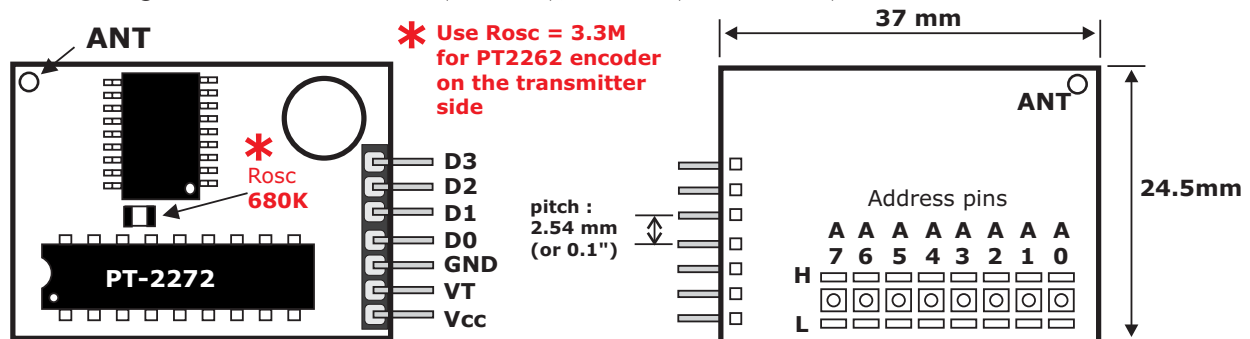

Each address pin can assume one of the 3 possible logic states.
i.e. : logic high (H), logic low (L) or floating (no connection)
The module is supplied with all the address pins open.

IMPORTANT NOTES

- 1) **Antenna** : Use any soft/hard wire with the specified length. If a telescopic antenna is used, be sure that it is fully extended. Length of antenna is important and frequency dependent (refer to the specs above for the correct length)
- 2) Supply voltage should be stable & with low ripple.
- 3) Note that output waveform may become distorted if the transmitter is too close to the receiver (\gg a few cm). This is inherent to superheterodyne receivers and is considered as normal